

P3500B SERIES

Semi-Automatic In-Line Repair Specialty Gas Control Panels

Specialty Gas Equipment

GENTEC® P3500 Series Specialty Gas Control Panel is a dual-bank semi-automatic changeover system, providing a continuous gas supply without interrupting the system during cylinder(s) replacement. When the primary bank is nearly depleted, a changeover will occur, in which the reserve bank will begin to supply gas to the system. One isolation valve on each bank allows the user to replace the cylinder(s) without discontinuing the gas supply. Each regulator is mounted on individual panels for convenient in-line repair. Available in both stainless steel and brass.



Product Features

- Dual-bank gas supply
- 2" chrome-plated brass gauges
- All parts are mounted on a single panel for easy installation
- Inlet valve(s) for changing cylinder(s) included. Outlet and Vent valves are optional
- Diaphragm valves include an easy-to-read status window (open / close)
- Integrated safety relief valve to ensure additional safety

Specifications


- **Maximum inlet pressure:** 3000, 500 psi
- **Maximum outlet pressure:** 25, 50, 100, 150, 250 psi
- **Operating temperature range:** -40 to 165 °F (-40 to 74 °C)
- **Leak rate:** 2×10^{-8} atm.cc/sec He
- **Cv:** 0.14

Materials of Construction


- **Regulator and valve body:** Chrome-plated brass
- **Regulator seat*:** PU, PTFE
- **Panel:** Aluminium Alloy
- **Panel inlet connections:** 1/4" GENLOK®
- **Panel outlet connections:** 1/4" GENLOK®

* In the event that the selected material of regulator seat is inappropriate for its applications, Gentec shall reserve the right to appoint an alternative seat material.

Dimensions

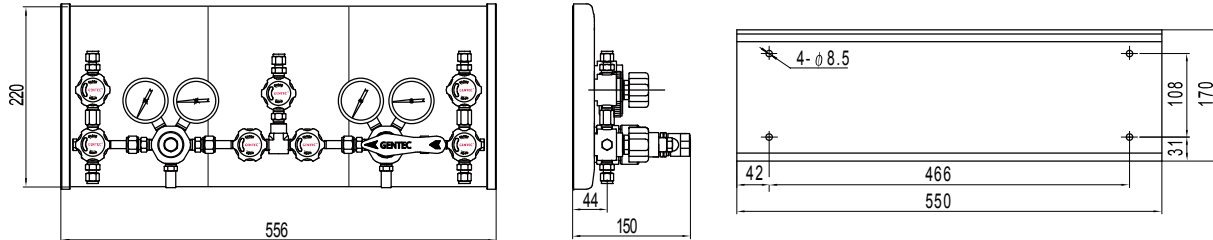

Flow Data

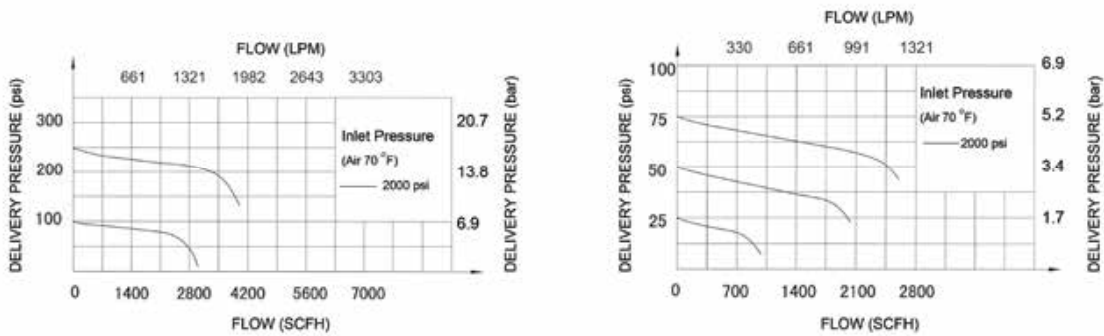

Ordering Information

EX: P35	1	1	B	P -	D	H	P		- N2
Series	Valve Assembly	Inlet Connection	Valve Body	Regulator Seat*	Inlet Pressure	Outlet Pressure	Gauge	Options	Gas Options
• P35	1: Inlet / outlet / vent 2: Inlet / vent 3: Inlet / outlet 4: Inlet only	1: 1/4" Genlok (Vertical) 2: 1/4" FSR (Vertical) 3: 1/2" FSR (Straight) 5: 1/4" NPT (Vertical) 6: 1/4" FNPT (Vertical)	B: Chrome-plated brass	P: PU T: PTFE	D: 3000 psi F: 500 psi	L: 25 psi K: 50 psi I: 100 psi H: 150 psi G: 250 psi	P: psi / bar K: psi / kPa W: No Gauge	Blank: Standard C: Electronic Contact Gauge V: Waste gas disposal	Blank: None AIR: Air HE: Helium O2: Oxygen H2: Hydrogen CH4: Methane CO2: Carbon Dioxide Ar: Argon N2: Nitrogen

*: Please contact GENTEC for regulator seat